



Our LED products are constantly developing and innovating. The update shape design of the LED product subject to the order confirmation.



KLC-301

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:3x1W
Size:Φ85*40mm
Open Hole:Φ75mm



KLC-501

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:5x1W
Size:Φ85*40mm
Open Hole:Φ75mm



KLC-701

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:7x1W
Size:Φ108*70mm
Open Hole:Φ95mm



KLC-901

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:9x1W
Size:Φ135*70mm
Open Hole:Φ120mm



KLC-1201

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:12x1W
Size:Φ135*70mm
Open Hole:Φ110mm





▶ KLC-303

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:3x1W
Size:Φ85*40mm
Open Hole:Φ75mm



▶ KLC-503

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:5x1W
Size:Φ110*80mm
Open Hole:Φ95mm



▶ KLC-703

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:7x1W
Size:Φ130*80mm
Open Hole:Φ95mm



▶ KLC-903

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:9x1W
Size:Φ140*85mm
Open Hole:Φ110mm



▶ KLC-1203

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:12x1W
Size:Φ140*85mm
Open Hole:Φ110mm





KLC-330

LED lighting source
 In Voltage: AC 100-265V
 Warm White : 2700K-3500K
 Cool White : 6000K-6500K
 LED Power:3x1W
 Size:Φ90*50mm
 Open Hole:Φ75mm



KLC-530

LED lighting source
 In Voltage: AC 100-265V
 Warm White : 2700K-3500K
 Cool White : 6000K-6500K
 LED Power:3x1W
 Size:Φ113*70mm
 Open Hole:Φ95mm



KLC-730

LED lighting source
 In Voltage: AC 100-265V
 Warm White : 2700K-3500K
 Cool White : 6000K-6500K
 LED Power:7x1W
 Size:Φ113*70mm
 Open Hole:Φ95mm



KLC-930

LED lighting source
 In Voltage: AC 100-265V
 Warm White : 2700K-3500K
 Cool White : 6000K-6500K
 LED Power:9x1W
 Size:Φ145*78mm
 Open Hole:Φ120mm



KLC-1230

LED lighting source
 In Voltage: AC 100-265V
 Warm White : 2700K-3500K
 Cool White : 6000K-6500K
 LED Power:12x1W
 Size:Φ145*78mm
 Open Hole:Φ120mm



▷ KLC-310A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 3x1W
Size: Φ100*70mm
Open Hole: Φ75mm



▷ KLC-310B

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 3x1W
Size: Φ100*90mm
Open Hole: Φ90mm



▷ KLC-312

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 3x1W
Size: Φ110*90mm
Open Hole: Φ90mm



▷ KLC-712

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 3x1W
Size: Φ110*85mm
Open Hole: Φ95mm



▷ KLC-512

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 3x1W
Size: Φ120*90mm
Open Hole: Φ105mm



▷ KLC-1210

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 12x1W
Size: Φ140*75mm
Open Hole: Φ120mm

▷ KLC-912

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 5x1W
Size: Φ140*90mm
Open Hole: Φ120mm



▷ KLC-501A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 5x1W
Size: Φ110*55mm
Open Hole: Φ95mm



▷ KLC-701A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 7x1W
Size: Φ110*70mm
Open Hole: Φ95mm



▷ KLC-503A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 5x1W
Size: Φ110*55mm
Open Hole: Φ95mm



▷ KLC-703A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 7x1W
Size: Φ110*70mm
Open Hole: Φ95mm



▷ KLC-1508B

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 5x3W
Size: Φ120*105mm
Open Hole: Φ100mm



▷ KLC-1208

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 12x1W
Size: Φ145*90mm
Open Hole: Φ125mm





LED ceiling Down Light is indoor light that embedded into the ceiling. Its biggest feature is the ability to maintain the overall architectural unity and perfect lighting setup will not harm the art of the perfect unity of the ceiling. This embedded in the ceiling, hidden within the set of flights, all light downward projection, a direct light distribution. Can use different reflectors, lenses, shutters, to get different lighting effects. Lamp does not occupy space, increase space soft atmosphere, if you want to create a warm feeling, try to install more light a lamp, to reduce space oppressive. Usually in hotels, shopping malls, family, coffee, etc to use more.



KLC-309

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:3x1W
Size:Φ102*75mm
Open Hole:Φ80mm



KLC-709

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:7x1W
Size:Φ112*78mm
Open Hole:Φ90mm



KLC-909

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:9x1W
Size:Φ120*90mm
Open Hole:Φ100mm



KLC-435

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:4x1W
Size:Φ122*70mm
Open Hole:Φ100mm



KLC-735

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:7x1W
Size:Φ145*75mm
Open Hole:Φ120mm



KLC-1235

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:12x1W
Size:Φ160*65mm
Open Hole:Φ145mm





KLC-326

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 3x1W
Size:Φ90*55mm
Open Hole:Φ75mm



KLC-726

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 7x1W
Size:Φ102*70mm
Open Hole:Φ80mm



KLC-1526

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 15x1W
Size:Φ145*85mm
Open Hole:Φ125mm



KLC-327

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 3x1W
Size:Φ90*65mm
Open Hole:Φ75mm



KLC-727

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 7x1W
Size:Φ140*90mm
Open Hole:Φ95mm



KLC-1527

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 15x1W
Size:Φ145*95mm
Open Hole:Φ120mm



KLC-502

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:5x1W
Size:Φ100*45mm
Open Hole:Φ75mm



KLC-702

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:7x1W
Size:Φ125*45mm
Open Hole:Φ95mm



KLC-902

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:9x1W
Size:Φ145*50mm
Open Hole:Φ120mm



KLC-1202

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:12x1W
Size:Φ180*50mm
Open Hole:Φ150mm



KLC-1502

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:15x1W
Size:Φ195*60mm
Open Hole:Φ160mm



KLC-305

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:3x1W
Size:Φ110*80mm
Open Hole:Φ90mm



KLC-705

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:7x1W
Size:Φ145*80mm
Open Hole:Φ120mm



KLC-905

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:9x1W
Size:Φ180*85mm
Open Hole:Φ160mm



KLC-1205

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:12x1W
Size:Φ180*85mm
Open Hole:Φ160mm



▷ KLC-904

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:9x1W
Size:132*132*75mm
Open Hole:125x125mm



▷ KLC-1604

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:36x1W
Size:165*165*70mm
Open Hole:145x145mm



▷ KLC-2504

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:25x1W
Size:200*200*75mm
Open Hole:180x180mm



▷ KLC-904A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:9x1W
Size:132*132*75mm
Open Hole:125x125mm



▷ KLC-1604A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:36x1W
Size:165*165*70mm
Open Hole:145x145mm



▷ KLC-2504A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:25x1W
Size:200*200*75mm
Open Hole:180x180mm



▷ KLC-513

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:5x1W
Size:Ø90*55mm
Open Hole:Ø80mm



▷ KLC-913

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:9x1W
Size:Ø130*70mm
Open Hole:Ø105mm



▷ KLC-1213

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:12x1W
Size:Ø180*80mm
Open Hole:Ø160mm



▷ KLC-529

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:5x1W
Size:100x100x60
Open Hole:Ø80mm



▷ KLC-929

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:5x1W
Size:142x142x70
Open Hole:Ø120mm




▷ KLC-1229

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:5x1W
Size:168x168x75
Open Hole:Ø145mm





Model	Watt	Size	Cutout	Color Temp. Fixture	pcs
KL-GS303-01	LED3x3W	118x118x12	100x100	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	12PCS/CN
KL-GS306-01	LED2x3x3W	222x118x12	200x100	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	12PCS/CN
KL-GS309-01	LED3x3x3W	306x118x12	280x100	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	8PCS/CN
KL-GS412-01	LED4x3x3W	390x118x12	375x100	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	8PCS/CN
KL-GS412-02	LED4x3x3W	390x208x12	180x180	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	6PCS/CN

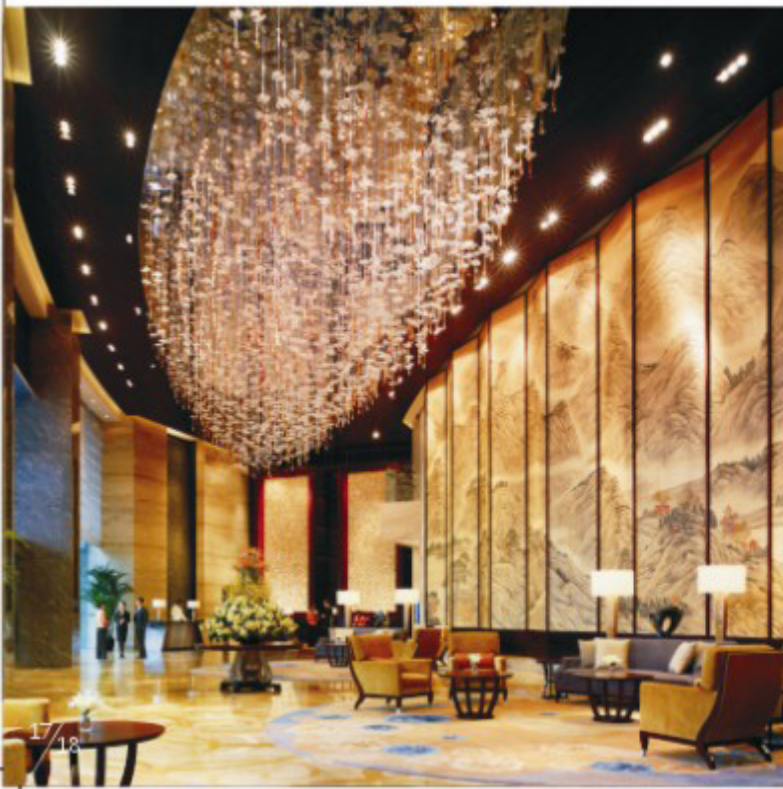

KL-GS412-02

Model	Watt	Size	Cutout	Color Temp. Fixture	pcs
KL-GS112-01	LED1x3x3W	135x135x140	170x170	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	12PCS/CN
KL-GS224-01	LED2x3x3x3W	345x135x140	330x170	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	12PCS/CN
KL-GS336-01	LED3x3x3x3W	500x135x140	485x170	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	8PCS/CN
KL-GS448-01	LED4x3x3x3W	645x135x140	490x170	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	8PCS/CN
KL-GS448-02	LED4x3x3x3W	844x844x140	325x325	Warm W/t to 3000K-3500K Cool W/t to 6000K-6500K	6PCS/CN



▶ KLG-301A

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:3x3W
Size:W95*Φ60*H155mm



▶ KLG-701A

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:7x3W
Size:W90*Φ78*H270mm



▶ KLG-902A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:9x3W
Size:W115*Φ105*H200mm



▶ KLG-1201A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:12x3W
Size:W130*Φ100*H205mm



▶ KLG010/7

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700K-3500K
Cool White : 6000K-6500K
LED Power:7x3W
Size:W135*Φ260*H90mm



High power LED projection lamp, simulation nature three colors energy-saving lighting efficiently increase commercial place lighting intensity, reduce visual distortion degree of integration, the top lighting module for you create a bright and comfortable environment. High power LED lighting using high efficiency, low import components, wide failure strobe, more healthy, each in the province. Make you happy. Product use: Office buildings, Marketplace, and government building bank, exhibition, etc.



► **KLG015/20**

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 20W
Size:W110*Φ75*H85mm

► **KLG-1202B**

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:12x1W
Size:W160*Φ105*H200mm



► **KLG-701B**

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 7x1W
Size:W155*Φ75*H85mm



► **KLG-702B**

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power: 7x1W
Size:W140*Φ76*H150mm



► **KLG010/7B**

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:7x1W
Size:W135*Φ90*H260mm



► **KLG011/12B**

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:12x1W
Size:W130*Φ100*H220mm



► **KLG013/18B**

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:18x1W
Size:W185*Φ120*H230mm



Can adjust the angle according to the needs, make to the best light angle effects; Using high-power 1w(3w) LED as the light source to replace the traditional light bulbs with energy saving and environmental protection functions; Lighting electrical integration, beautiful and compact design, easy to install; before the open source replacement, easy maintenance; With imported light source. Built-in constant-current driver, having stable performance; This series of products are recommended to single color LED, lifetime about 50000hours; For outdoor eaves, edges and corners of the cast light, point-like effect of projection to make up for lack of local brightness for indooring, cabinet lighting products, local cast light.



▶ KLG013/18

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:18x1W
Size:W185*H110mm

▶ KLG-180B

LED Lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:18x1W
Size:W170*H120*H20mm



▶ KLG010/7

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:7x1W
Size:W120*H80*H215mm



▶ KLG-502A

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:5x1W
Size:W115*H80*H170mm

▶ KLG011/12

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:12x1W
Size:W130*H100*H220mm



▶ KLG013/12

LED lighting source
In Voltage: AC 100-265V
Warm White : 2700k-3500k
Cool White : 6000k-6500k
LED Power:12x1W
Size:W165*H100*H230mm



High Power LED Project-light Light



KL-T12N1

LED Power:12x1W



KL-T03N1

IN Voltage:AC 100V-165V
Watts:3x1W
lument Efficiency:90LM/W
IP Rating:IP66
Color:RGB/PW/WW
Size:W102xH73xØ73



KL-T03N2

IN Voltage:AC 100V-165V
Watts:3x1W
lument Efficiency:90LM/W
IP Rating:IP66
Color:RGB/PW/WW
Size:W102xH73xØ73



KL-T03N3

IN Voltage:AC 100V-165V
Watts:3x1W
lument Efficiency:90LM/W
IP Rating:IP66
Color:RGB/PW/WW
Size:W100xH78xØ65



KL-T06N1

IN Voltage:AC 100V-165V
Watts:6x1W
lument Efficiency:90LM/W
IP Rating:IP66
Color:RGB/PW/WW
Size:W116xH98xØ84



KL-T03N6

IN Voltage:AC 100V-165V
Watts:3x1W
lument Efficiency:90LM/W
IP Rating:IP66
Color:RGB/PW/WW
Size:W116xH80xØ68



KL-T07N1

IN Voltage:AC 100V-165V
Watts:7x1W
lument Efficiency:90LM/W
IP Rating:IP66
Color:RGB/PW/WW
Size:W125xH96xØ84





KL-T60N1

IN Voltage: AC 100V-165V
 Watts: 60Wx1
 IP Rating: IP65
 CCT: 2700K-6500K
 Size: 310x235x155

These project-light lamp are the kind of perfect and practical lighting products for highlighting building structure. The aluminum bodies have been subject to anodic oxidation treatment, showing metal texture and weathering resistance; optical glass is subject to waterproof treatment by means of mechanical pressing; accurate secondary optical design ensures the highest light requirements of a artistic design of buildings.



KL-T0N3

IN Voltage: AC100V-165V
 Watts: 10Wx1
 IP Rating: IP65
 CCT: 2700K-6500K
 Size: 115x85x85



KL-T10N2

IN Voltage: AC100V-165V
 Watts: 10Wx1
 IP Rating: IP65
 CCT: 2700K-6500K
 Size: 115x85x85

KL-T20N2

IN Voltage: AC100V-165V
 Watts: 20Wx1
 IP Rating: IP65
 CCT: 2700K-6500K
 Size: 180x140x105



KL-T20N3

IN Voltage: AC100V-165V
 Watts: 20Wx1
 IP Rating: IP65
 CCT: 2700K-6500K
 Size: 180x140x105



KL-T30N3

IN Voltage: AC100V-165V
 Watts: 30Wx1
 IP Rating: IP65
 CCT: 2700K-6500K
 Size: 225x185x125





1. Material and Characteristics: Aluminum alloy body adopt advanced surface treatment technology, dirty-resistance and anti-corrosion.
2. Safe usage : The IP degree is Ip65 . The power supply has the protection circuit.
3. Excellent heat-dissipation performance ; The high power LED is directly fixed on the radiator shell which can reduce heat resistance and improve the efficiency of heat-dissipation.
4. Environment friendly: no halogen , mercury and other harmful elements . It meets the standards of ROHS.

KL-T30N1

IN Voltage: AC100V - 165V
 Watts: 30Wx1
 IP Rating: IP65
 CCT: 2700K - 6500K
 Size: 225x185x125



KL-T50N1

IN Voltage: AC100V - 165V
 Watts: 50Wx1
 IP Rating: IP65
 CCT: 2700K - 6500K
 Size: 285x235x135



KL-T50N2

IN Voltage: AC100V - 165V
 Watts: 50Wx1
 IP Rating: IP65
 CCT: 2700K - 6500K
 Size: 285x235x135



KL-T50N3

IN Voltage: AC100V - 165V
 Watts: 50Wx1
 IP Rating: IP65
 CCT: 2700K - 6500K
 Size: 285x235x135

